



Asus W2W-A1 Keyboard Replacement

Replace a broken or damaged keyboard with a new one.

Written By: Joe Redfearn






TOOLS:

- [Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)




PARTS:

- [Keyboard](#) (1)

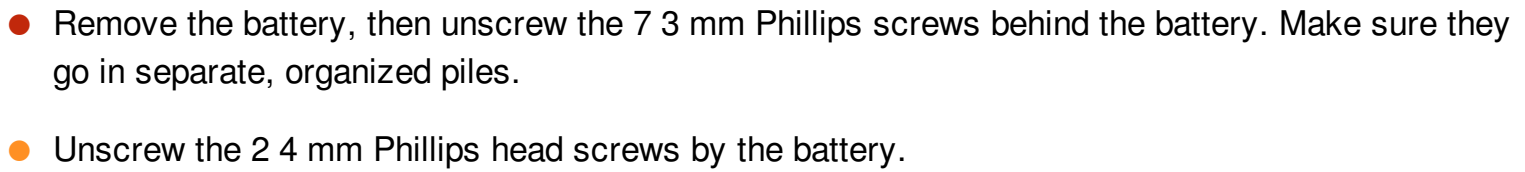

Step 2



Step 3



- Once the panel is removed, use the spudger to pry out the keyboard.

⚠ Do not fully remove, for the keyboard is still attached to the ribbon cable.

Step 4



- Detach the ribbon cable from the keyboard by pulling the end of the ribbon cable that is attached inside of the laptop.

⚠ Be sure to detach from the root rather than from near the middle. It should slide out with ease.

- Now you can fully remove the keyboard from the laptop.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 11:57:08 AM.